

TECHNICAL INFORMATION



MADE BY NATURE

LISBON COLLECTION



CORK FLOATING FLOOR

TECHNICAL INFORMATION:



Top layer: Cork 3mm
MDF: 6 mm
Base: Cork 1,5mm

STD RANGE:

Dimensions: 900 x 300 x 10,5mm
Finish: Dwear® Ceramic Varnish


Uniclic® floor assembling system

Packing: 8 Planks per Carton
(2,16m²/carton).
40 Cartons /Pallet

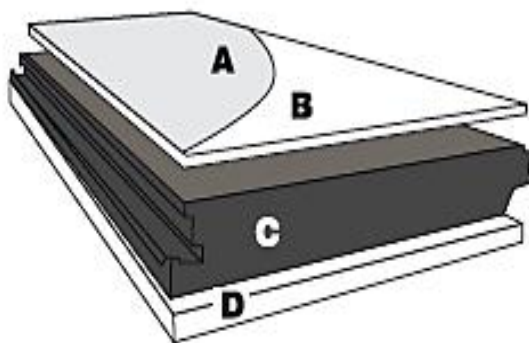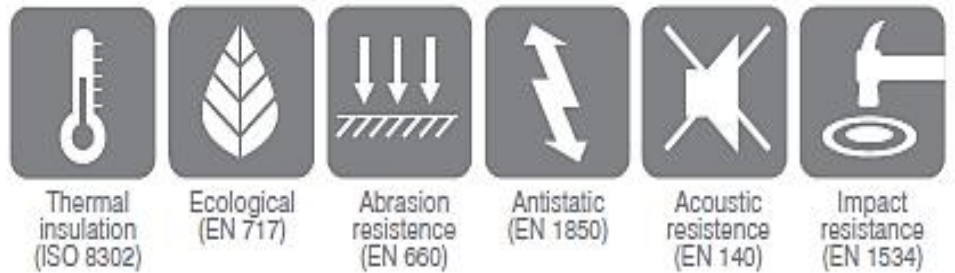

Technical Information

- A** - Dwear varnish
- B** - Top layer: Cork 3mm
- C** - MDF 6mm
- D** - Base: Cork 1,5mm



Class:

23



31





PRATI COLLECTION



CORK FLOATING FLOOR

TECHNICAL INFORMATION:


Top layer: Cork 3mm
HDF: 6 mm
Base: Cork 1,5mm

STD RANGE:

Dimensions: 900 x 300 x 10,5mm
Finish: Dwear® Ceramic Varnish

Uniclic® floor assembling system

Packing: 8 Planks per Carton
 (2,16m²/carton).
 40 Cartons /Pallet

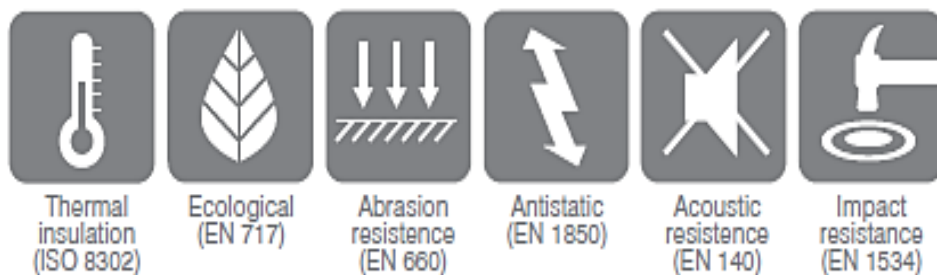

Thermal insulation (ISO 8302)


Ecological (EN 717)

Abrasion resistance (EN 660)

Antistatic (EN 1850)


Acoustic resistance (EN 140)

Impact resistance (EN 1534)

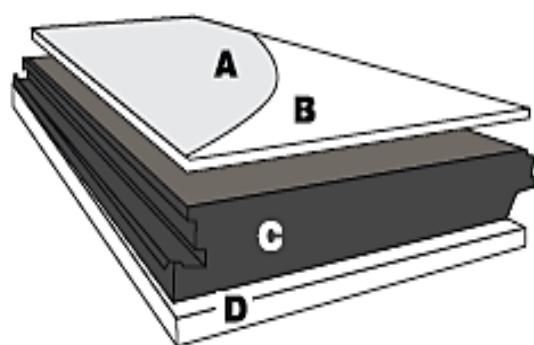

Technical Information

- A** - Dwear varnish
- B** - Top layer: Cork 3mm
- C** - HDF 6mm
- D** - Base: Cork 1,5mm



LOCKING INSTALLATION SYSTEM:



Easy and simple. No Glue.

Class:	23		
	31		



PRATI TILE COLLECTION



CORK FLOOR TILES

TECHNICAL INFORMATION:

Thickness: 4mm

Dimensions: 600 x 300mm; 300 x 300mm

Finishes: Dwear varnish

Packing:

600 x 300 x 4mm:

66 tiles (6 packs of 11 units) per carton (11,88 sqm; 22,9 Kg)

300 x 300 x 4mm:

132 tiles (12 packs of 11 units) per carton (11,88 sqm; 22,9 Kg)



Thermal
insulation
(ISO 8302)



Ecological
(EN 717)



Abrasion
resistance
(EN 660)



Antistatic
(EN 1850)



Acoustic
resistance
(EN 140)



Impact
resistance
(EN 1534)



Class:
23
31

