


INTERLOCKING DECK TILE INSTALLATION INSTRUCTIONS

Congratulations on the purchase of your new Kontiki Interlocking Deck Tiles! These low maintenance, mold and mildew resistant deck tiles can be installed on any solid surface. Great for balconies, decks, entryways, porches, patios, sunrooms and to refresh an old deck or an unattractive concrete patio, these deck tiles are easy to install. With no fading, cracking or warping, these deck tiles will retain their wood-like appearance for years to come.

STEP 1




Unpacking: To determine the number of tiles you will need, first measure the area to be covered. If measuring in feet, multiply by 12 to convert to inches, then divide by 11.8 to determine the number of tiles needed.

STEP 2





Clean the solid surface of all debris to ensure proper water drainage.

STEP 3




Lay tiles starting at outside edge of surface. This ensures that cut tiles are the last row against the house, fence, pool, etc

STEP 4




Continue laying tiles and snapping them together using checkered or parallel patterns until desired surface is covered. For finished edges, use a chisel to remove exposed connectors.

STEP 5

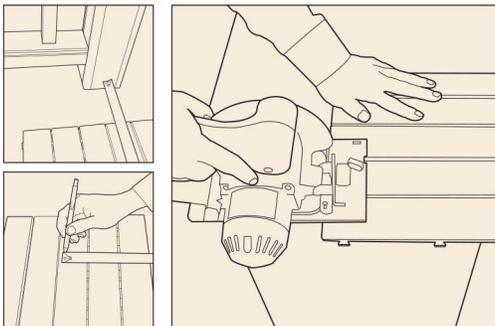

You may reach a point where an entire tile will not fit and may need to be cut. Simply measure area left (11.8 inches and under) and transcribe remaining area onto the tile. Cut the tile to the desired length. Any loose boards may be re-attached with 1/2" long, #8 screws (not included), installed through the small round holes on the underside of the tile. A circular saw is recommended with a blade of 16 teeth or less. Make quick cuts. For installations around existing railing posts, simply cut tiles to post line, and notch mating tile around post area.

STEP 6



Enjoy.

For more information, please call our toll-free number 1-877-631-2845 or visit our website at www.builddirect.com