

PRODUCT RECOMMENDATION

Indoors - Areas that do not get any direct sunlight or any contact with water, moisture, or intense heat source of any kind.

Outdoors - Restricted to covered and protected areas that do not get any direct sunlight or any contact with water, moisture, or intense heat source of any kind.

INSTALLATION

If storing the product, it should be placed on a wooden pallet, in an area that is covered, dry, and free from any heat.

In locations with relative humidity less than 50%, it is recommended to acclimate the product by removing the pieces out of packaging and leave at room temperature for a minimum period of 48 hours, before installation.

This product is made of reforestation wood with certification FSC (Forest Stewardship Council) and has been treated against fungi and termites.

All products are produced by artisanal techniques and there may be slight size differences, lumpy edges and shades. They are characteristics of this type of product, as well as the unique look of the wood. Taking this into consideration, it is recommended to evaluate the pieces by setting them together to have a better look at the overall combinations, before applying them to the wall or surface area.

Important: It is recommended to order an extra percentage of the product for possible cutting on edges and waste.

INSTRUCTIONS FOR LAYING

In case of remodeling or new construction, it is recommended to apply this product at the end of the work. Avoid contact with other construction waste, such as dust, paint and other materials.


It is also recommended that the installer have basic notions of carpentry, as well as the use of any tools to cut the pieces and retouches. The use of wax finishing may be required for the cut edges. Decopainel offers a repair kit wax to purchase.

Internal walls with infiltration or humidity are required to be waterproofed. The surface must be perfectly smooth, clean, completely dry, solid and leveled before installation.

The product cannot be applied on a thick plaster surface or paint with any textures. On painted surfaces, make sure that the paint is completely dry and adhered to the wall, without bubbles, dust, moisture or peeling. If so, proceed with removal of the painting in its entirety.

ATTENTION: The pieces should be fixed on the wall respecting the plumb, level and square. It is important to leave a dilatation joint of a minimum of 6mm where the product meets the floor, surrounding walls and ceiling to allow any normal contractions and / or expansions of the wood.

To install the panels, simply remove the film covering the adhesive. Place the panels one by one on the surface, pressing them with the palm of your hand. During the installation, place panels as close as possible to each other leaving no spaces between them, so that the panel becomes uniform without visible seams. For this product grouting is not allowed.

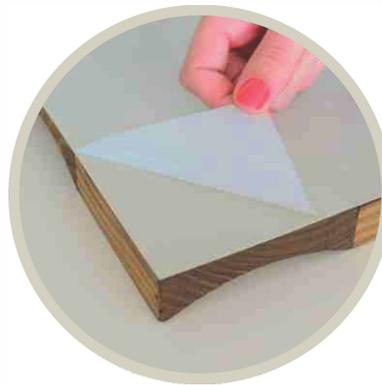

Respect the time of adhesive curing, estimated at 24 hours. For more details, visit the illustrative video:

<https://www.youtube.com/watch?v=5U9fZs8Q30g>

CLEANING AND MAINTENANCE

For cleaning only use a dry or water moistened cloth, soft - bristled brush or vacuum cleaner. It is not recommended to use sponges, bushings or abrasive materials. The contact with the solvent - based products can change and / or damage the finishing.

WARRANTY

All panels are guaranteed for five (5) years from the date of purchase. The warranty covers manufacturing defects only.

Coverage of manufacturing defects is guaranteed only if installed and used correctly, according to the guidelines of installation and maintenance described in this manual. Complaints will only be accepted upon proof of purchase invoice.

Installed product are considered an accepted product and in perfect condition.

For more information please visit www.decopainel.com or contact us at info@decopainel.com